

Pedestrian Head Detail.

Traffic Signal Pole Notes:


This detail refers to all controlled crossings.

All controlled traffic signals to be Audible, Tactile(Vibrating).

All services and gullies to be kept dear of crossing where possible.

Position of pole to be located max. 500mm from tactile paving edge to centre line of pole, and 500mm from kerb edge to centre line of pole.

Refer to dished kerb detail.

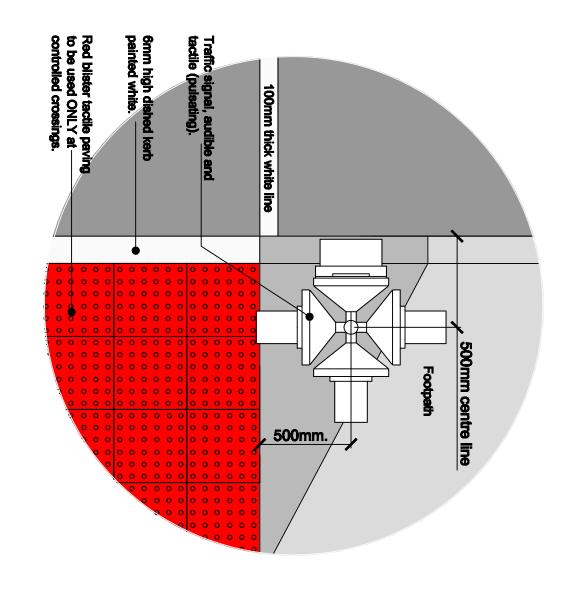

Plan of Traffic Signal

Ref: Traffic Management Guidelines p.155. S.I. 181 (1997)-33.

Detail Drawing 4